

HEAVY DUTY - PARALLEL HELICAL GEARMOTORS (RF)



Sizes


- 7 (with 2 / 3 reduction stages)
- Torque range 400Nm to 8250Nm
- Shaft diameter ranges from 35mm to 90mm
- Monolithic cast iron housing

Output Options

- Solid Shaft, Hollow Shaft & Splined Shafts
- All units are dimensionally interchangeable with other major European manufacturers

Reduction Ratios

- From 5 to 125:1
- Vertical, horizontal & direct drive mounting configurations
- Geared motor, Motor-mount Reducer for IEC Motor and Reducer unit with Solid input shaft
- Customization is Possible Upon Request

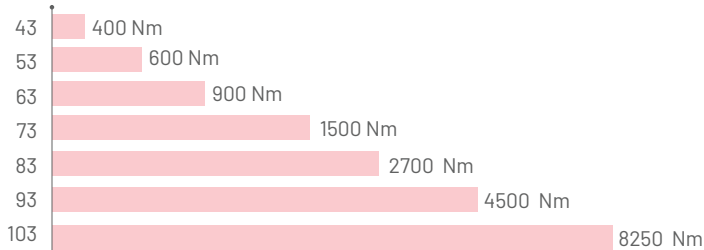

HEAVY DUTY - HELI-BEVEL GEARMOTORS (RK)

Sizes

- 6 (with 3 reduction stages)
- Torque range 450Nm to 8500Nm
- Shaft diameter ranges from 35mm to 90mm
- Monolithic cast iron housing

Reduction Ratios

- From 5 to 125:1
- IEC Input Adapters from 63 to 280
- Vertical, horizontal and direct drive mounting configurations
- Geared motor, Motor-mount Reducer for IEC Motor and Reducer unit with Solid input shaft

Output Options

- Solid Shaft, Hollow Shaft & Splined Shafts
- All units are dimensionally interchangeable with other major European manufacturers
- Customization is Possible Upon Request

